


Standard Recovery Diodes, 240 A (INT-A-PAK Power Modules)



FEATURES

- High voltage
- Electrically isolated by DBC ceramic (Al_2O_3)
- 3000 V_{RMS} isolating voltage
- Industrial standard package
- High surge capability
- Glass passivated chips
- Modules uses high voltage power diodes in four basic configurations
- Simple mounting
- UL approved file E320098
- Compliant to RoHS
- Designed and qualified for multiple level

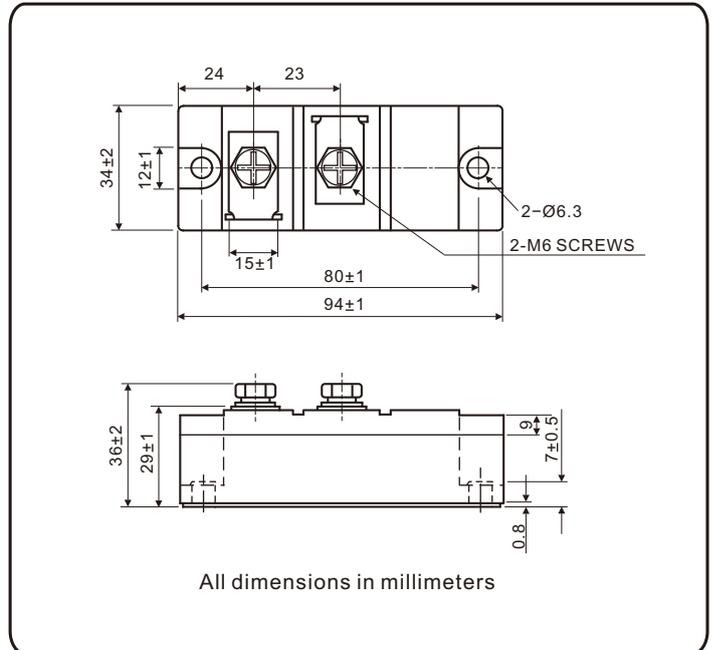

APPLICATIONS

- DC motor control and drives
- Battery charger
- Welders
- Power converters



PRODUCT SUMMARY	
$I_{F(AV)}$	240 A
Type	Modules - Diode, High Voltage

MAJOR RATINGS AND CHARACTERISTICS			
SYMBOL	CHARACTERISTICS	VALUE	UNITS
$I_{F(AV)}$		240	A
	T_C	100	°C
$I_{F(RMS)}$		376	A
I_{FSM}	50 Hz	9600	
	60 Hz	10050	
i^2_t	50 Hz	460	kA ² s
	60 Hz	419	
$i^2_{\sqrt{t}}$		4600	kA ² \sqrt{s}
V_{RRM}		400 to 1600	V
T_J	Range	-40 to 150	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM} AT 150 °C mA
NKE240..A	04	400	500	10
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	


FORWARD CONDUCTION						
PARAMETER	SYMBOL	TEST CONDITIONS		VALUE	UNITS	
Maximum average on-state current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave		240	A	
				100	°C	
Maximum RMS on-state current	$I_{F(RMS)}$	180° conduction, half sine wave ,50Hz , $T_C = 100^{\circ}C$		376	A	
Maximum peak, one-cycle, on-state non-repetitive surge current	I_{FSM}	t = 10 ms	No voltage reappplied	9600		
		t = 8.3 ms		10050		
Maximum I^2t for fusing	I^2t	t = 10 ms	100% V_{RRM} reappplied	460		kA ² s
		t = 8.3 ms		419		
		t = 10 ms		325		
		t = 8.3 ms		296		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reappplied		4600	kA ² √s	
Maximum forward voltage drop	V_{FM}	$I_{FM} = 720A$, $T_J = 25^{\circ}C$, 180° conduction		1.45	V	

BLOCKING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum peak reverse and off-state leakage current	I_{RRM}	$T_J = 150^{\circ}C$		10	mA
RMS isolation Voltage	V_{ISO}	50 Hz, circuit to base ,all terminals shorted ,t = 1s		3000	V
		t = 60s		2500	

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum junction operating temperature range	T_{Stg} , T_J			- 40 to 150	°C
Maximum thermal resistance, junction to case per junction	R_{thJC}	DC operation		0.14	°C/W
Maximum thermal resistance, case to heatsink per module	R_{thCS}	Mounting surface, smooth , flat and greased		0.09	
Mounting torque ± 10 %	IAP to heatsink, M6 busbar to IAP, M6	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.		4 to 6	N.m
Approximate weight				180	g
				6.3	oz.
Case style				New INT-A-PAK	

Ordering Information Tabel

Device code

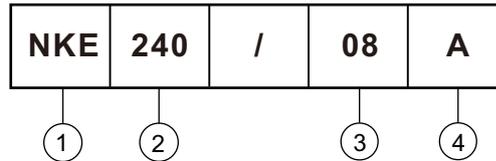

- | |
|---|
| 1 |
|---|

 - Module type, NKE for single diode
- | |
|---|
| 2 |
|---|

 - Current rating : $I_{F(AV)}$
- | |
|---|
| 3 |
|---|

 - Voltage code x 100 = V_{RRM}
- | |
|---|
| 4 |
|---|

 - Assembly type, "A" for soldering type

Nell High Power Products

Fig.1 On-state current vs. voltage characteristic

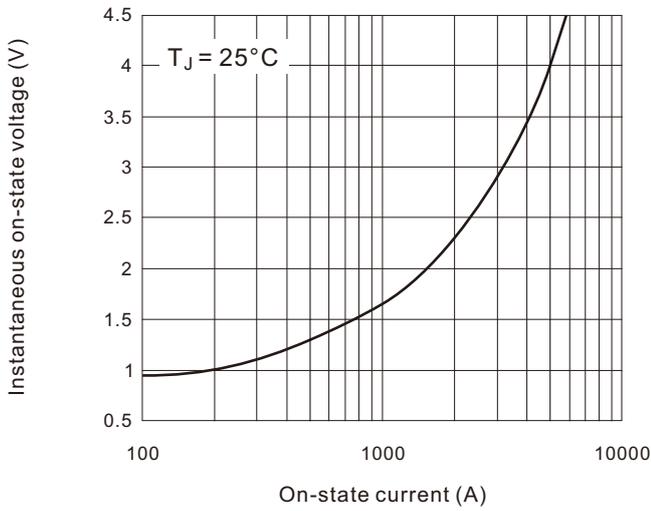


Fig.2 Transient thermal impedance(junction-case)

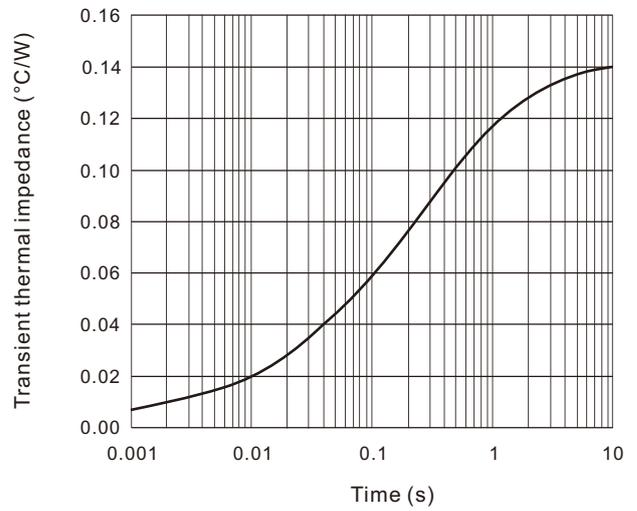


Fig.3 Power consumption vs. average current

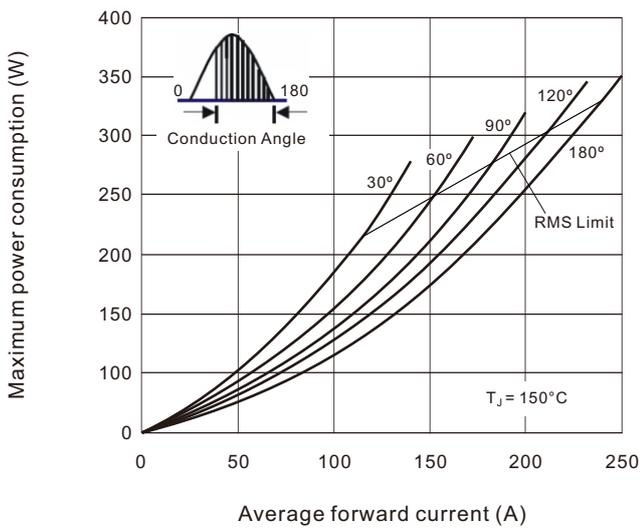


Fig.4 Case temperature vs. on-state average current

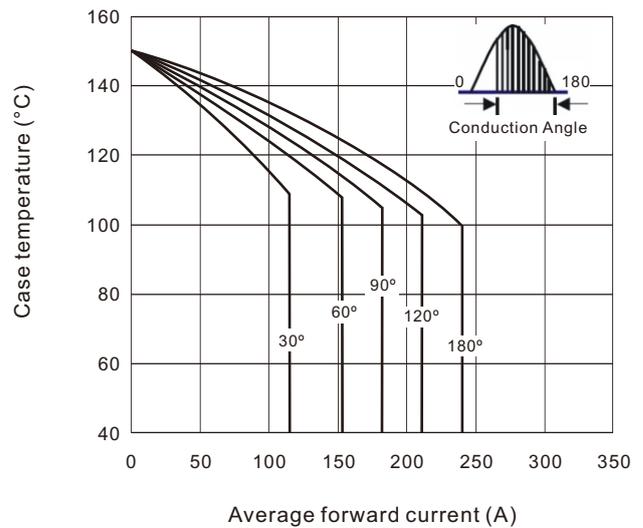


Fig.5 On-state surge current vs. cycles

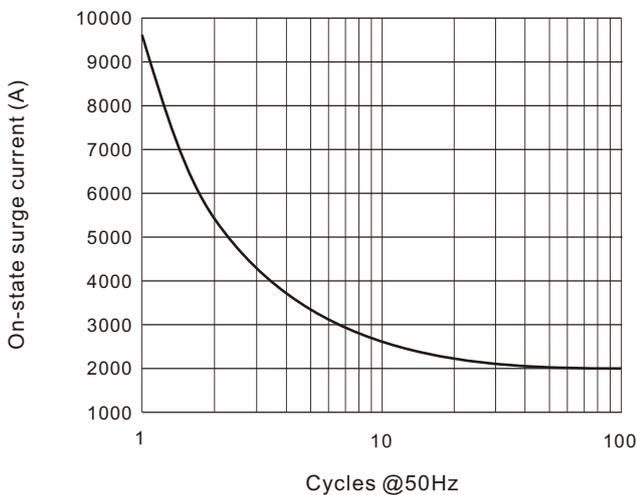


Fig.6 I²t Characteristic

