


Three-Phase Bridge Rectifier, 150A


MTP15008D Thru MTP15018D

(MTP150-08 Thru MTP150-18)

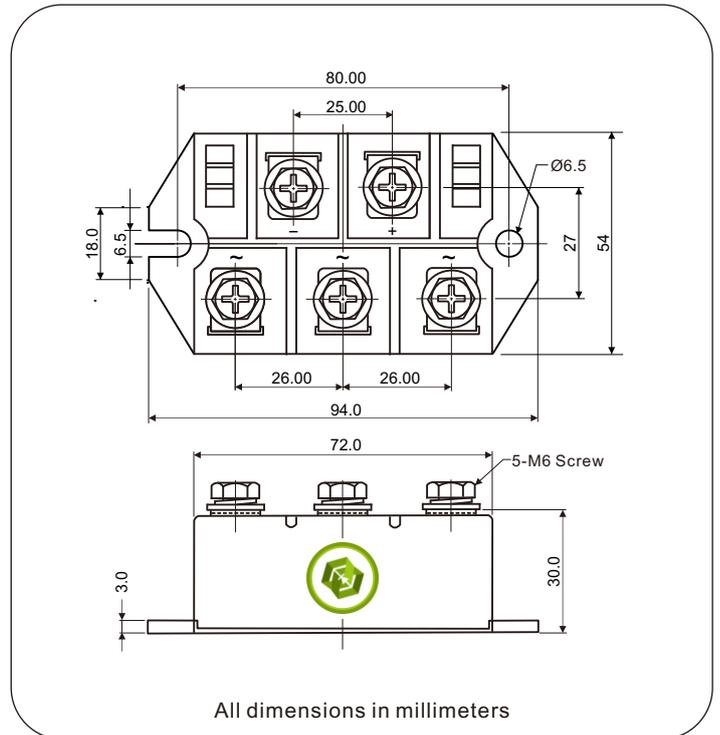

FEATURES

- UL recognition file number E320098
- Typical IR less than 2.0 μ A
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

ADVANTAGE

- International standard package
Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- **Weight:** 300g (10.6 ozs)

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	150A
V_{RRM}	800V to 1800V
I_{FSM}	1500A
I_R	20 μ A
V_F	1.2V
$T_{Jmax.}$	150°C

Nell High Power Products


MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP150..D					UNIT
		08	10	12	16	18	
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	1200	1600	1800	V
Peak reverse non-repetitive voltage	V_{RSM}	900	1100	1300	1700	1900	V
Maximum DC blocking voltage	V_{DC}	800	1000	1200	1600	1800	V
Maximum average forward rectified output current	$I_{F(AV)}$	150					A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	1500					A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I^2t	11250					A ² s
RMS isolation voltage from case to leads	V_{ISO}	2500					V
Operating junction storage temperature range	T_J	-40 to 150					°C
Storage temperature range	T_{STG}	-40 to 125					°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP150..D					UNIT
			08	10	12	16	18	
Maximum instantaneous forward drop per diode	$I_F = 150\text{A}$	V_F	1.20					V
Maximum reverse DC current at rated DC blocking voltage per diod	$T_A = 25^\circ\text{C}$	I_R	20					μA
	$T_A = 150^\circ\text{C}$		6000					

THERMAL AND MECHANICAC ($T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP150..D					UNIT
			08	10	12	16	18	
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	$R_{\theta JC}^{(1)}$	0.14					°C/W
Mounting torque $\pm 10\%$ to heatsink M6 to terminal M6	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		5					Nm
			5					
Approximate weight			300					g

Notes

(1) With heatsink, single side heat dissipation, half sine wave.

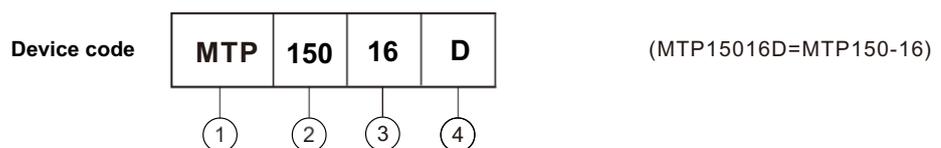

- 1 - Module type: "MTP" for 3Ø Bridge
- 2 - $I_{F(AV)}$ rating: "150" for 150A
- 3 - Voltage code: code x 100 = V_{RRM}
- 4 - Package Outline: D type package

Nell High Power Products

Fig.1 Forward current vs. Forward voltage

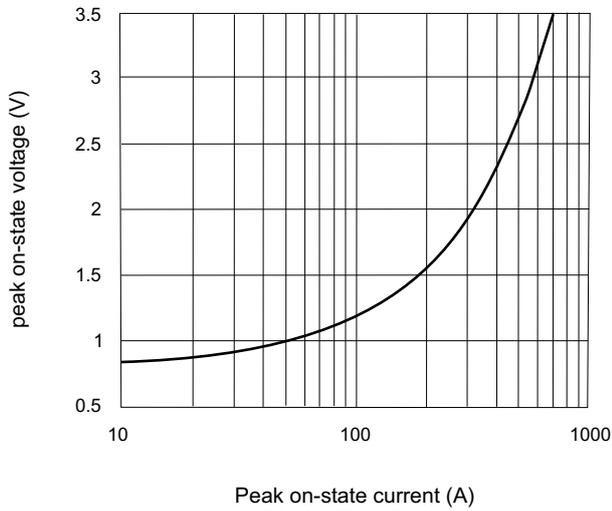


Fig.2 Thermal Impedance (junction to case)

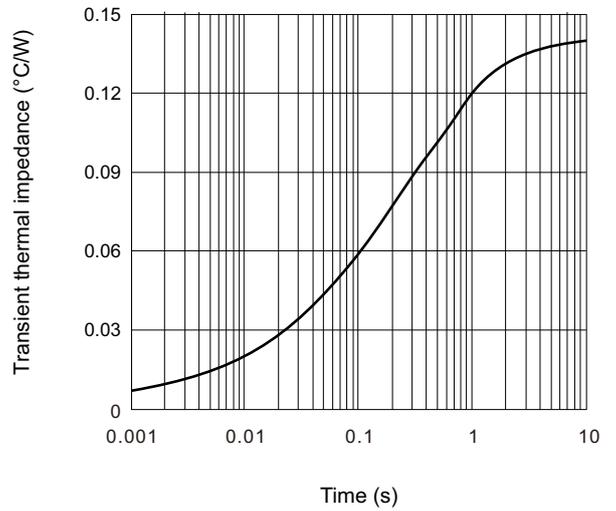


Fig.3 Power consumption vs. Average current

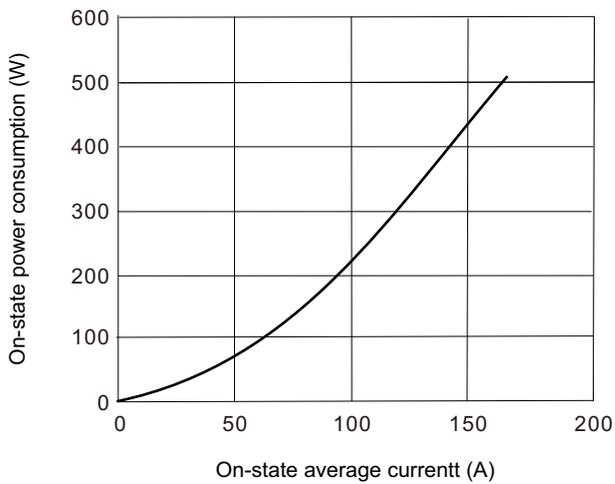


Fig.4 Case temperature vs On-state average current

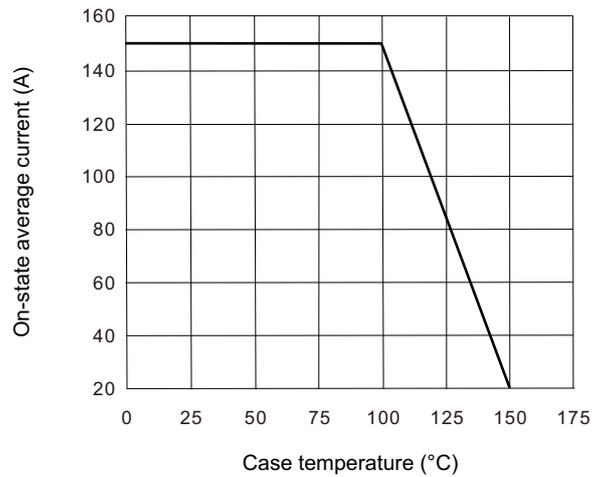


Fig.5 Forward surge current vs. cycle

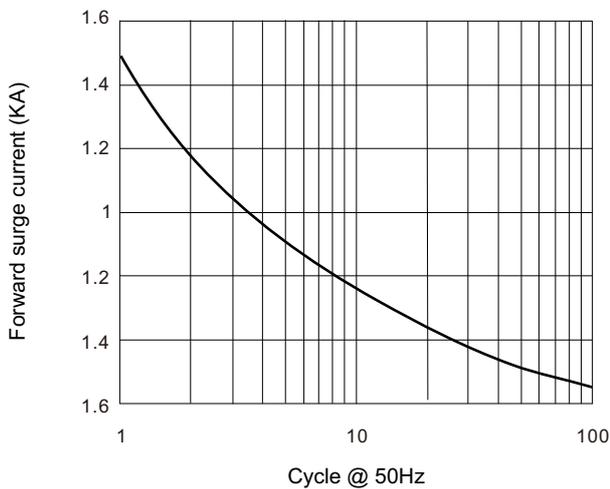


Fig.6 I²t characteristic

