


Glass Passivated Triple-Phase Bridge Rectifier, 25A

MTP2506A1 Thru MTP2516A1

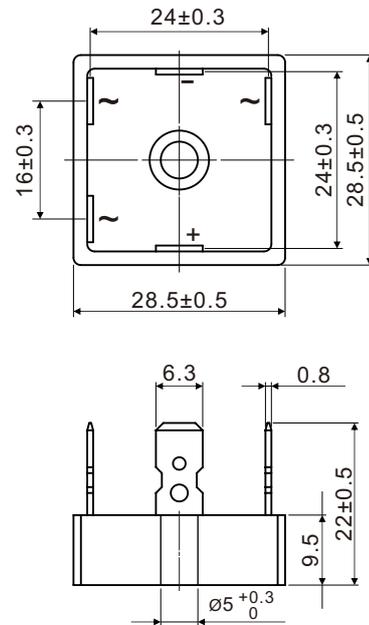


All dimensions in millimeters

FEATURES

- UL recognition file number E320098
- Universal 3-way terminals: snap-on, wire wrap-around, or PCB mounting
- Typical IR less than 1.0 μ A
- High surge current capability
- Low thermal resistance
- Solder dip 260°C, 40s
- Compliant to RoHS
- Glass passivated chips

TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

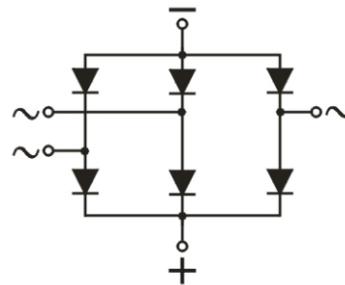

MECHANICAL DATA

- Case:** GBPC
Epoxy meets UL 94 V-O flammability rating
- Terminals:** Gold plated on faston lugs or gold plated on wire leads, solderable per J-STD-002 and JESD22-B102.
- Polarity:** As marked
- Mounting Torque:** 20 inches-lbs. max.
- Weight:** 21g (0.74 ozs)

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	25A
V_{RRM}	600V to 1600V
I_{FSM}	300A
I_R	5 μ A
V_F	1.1V
$T_{J \max.}$	150°C

MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP25..A1					UNIT
		06	08	10	12	16	
Maximum repetitive peak reverse voltage	V_{RRM}	600	800	1000	1200	1600	V
Maximum RMS voltage	V_{RMS}	420	560	700	840	1120	V
Maximum DC blocking voltage	V_{DC}	600	800	1000	1200	1600	V
Maximum average forward rectified output current (Fig.1)	$I_{F(AV)}$	25					A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	300					A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I^2t	374					A^2s
RMS isolation voltage from case to leads	V_{ISO}	2500					V
Operating junction storage temperature range	T_J, T_{STG}	-55 to 150					$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP25..A1					UNIT
			06	08	10	12	16	
Maximum instantaneous forward drop per diode	$I_F = 12.5\text{A}$	V_F	1.1					V
Maximum reverse DC current at rated DC blocking voltage per diode	$T_A = 25^\circ\text{C}$	I_R	5					μA
	$T_A = 150^\circ\text{C}$		1000					
Typical junction capacitance per diode	4V, 1MHz	C_J	300					pF

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP25..A1					UNIT
		06	08	10	12	16	
Typical thermal resistance	$R_{\theta JC}^{(1)}$	0.9					$^\circ\text{C/W}$

Notes

- (1) With heatsink
- (2) Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with #10 screw

ORDERING INFORMATION TABLE

Device code	MTP	25	10	A1
	①	②	③	④
	①	-	Module type: 3 phase Bridge	
	②	-	Current rating: $I_{F(AV)}$	
	③	-	Voltage code x 100: V_{RRM}	
	④	-	Package outline, A1 for "GBPC" package	

Fig.1 Forward current derating curve

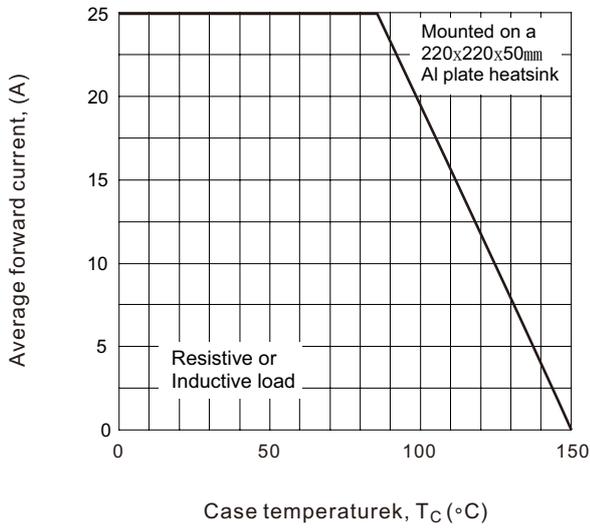


Fig.2 Typical forward characteristics

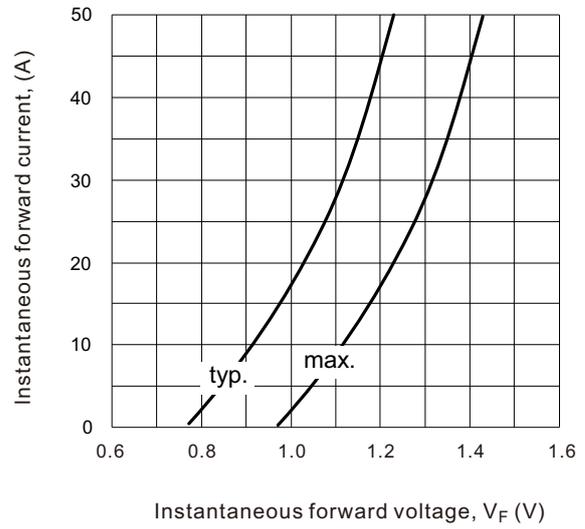


Fig.3 Max non-repetitive peak surge current

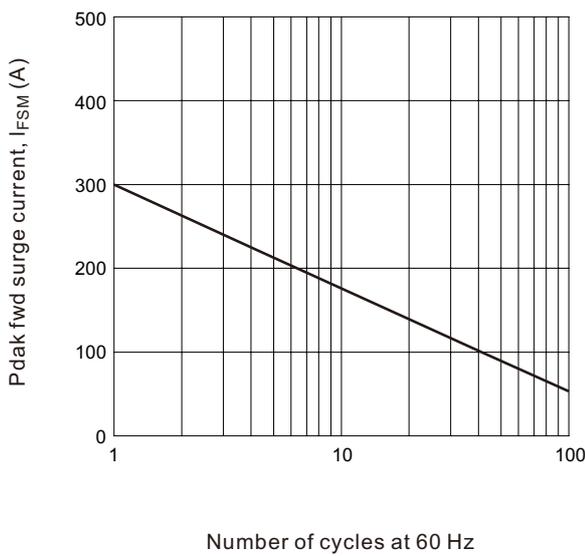


Fig.4 Transient thermal impedance

